


H 40
H42 Y-64 C、I、P、R
W 100

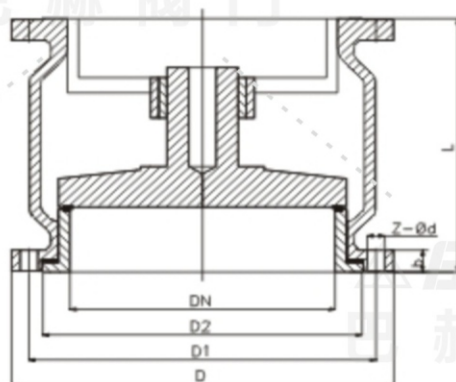

主要外形尺寸和连接尺寸 Main external dimensions and connection dimensions

PN	DN	L	D	D1	D2	D6	b	Z-Ød
4.0MPa	15	85	95	65	45	-	16	4-14
	20	95	105	75	55	-	16	4-14
	25	105	115	85	65	-	16	4-14
	32	150	135	100	78	-	16	4-18
	40	160	145	110	88	-	18	4-18
	50	170	160	125	100	-	20	4-18
	65	180	180	145	120	-	22	8-18
	80	200	195	160	135	-	22	8-18
	100	210	230	190	160	-	24	8-23
	125	275	275	220	188	-	28	8-25
	150	300	300	250	218	-	30	8-25
6.4MPa	200	380	375	320	282	-	38	12-30
	40	170	165	125	125	76	24	4-23
	50	190	175	135	135	88	26	4-25
	65	210	200	160	160	110	28	8-23
	80	230	210	170	170	121	30	8-25
	100	250	250	200	200	150	32	8-25
	125	290	295	240	240	176	36	8-30
	150	320	340	280	280	204	38	8-34
10.0MPa	200	400	405	345	345	260	44	12-34
	40	170	465	125	95	76	26	4-23
	50	190	195	145	112	88	28	4-25
	65	210	220	170	138	110	32	8-25
	80	230	230	180	148	121	34	8-25
	100	250	250	210	172	150	38	8-30
	125	290	290	250	210	176	42	8-34
	150	320	320	290	250	204	46	12-34
	200	400	400	360	312	260	54	12-41